# Lateral screen support

Quick Start Guide – Rev 0.0 May 2025

PACKING LIST

2u- Main support

4u- 90-degree bracket

8u- Spacer

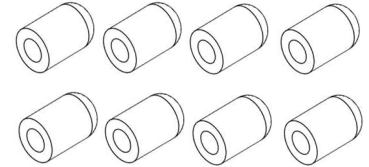**4u- black bolts M4x6**

**4u- Cord grip**

8u- black bolts M4x20

8u- Knurl bolt M4x25

8u- Rubber end cap

1u- Elastic cord

ASSEMBLE THE COMPLETE SET

Collect all the packing list items, following the reference images provided. Pay attention to the fact that the two assemblies are symmetrical, so they should not be mounted identically.

You need to cut 2 elastic cords with a length equal to (monitor width – 50) × 0.85. For example: if your monitor is 400 mm wide, then 400 – 50 = 350 × 0.85 = 297.5 mm.

400.00 mm

rotAIR type-1

rotAIR type-2

Elastic cord

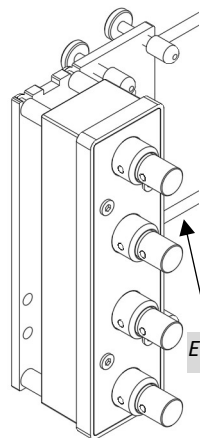*If your monitor is thinner than 10 mm, it's better to skip the spacers.*

In that case, instead of using the M4x20 screws, you should use the M4x8 screws (not illustrated) included with your rotAIR unit.

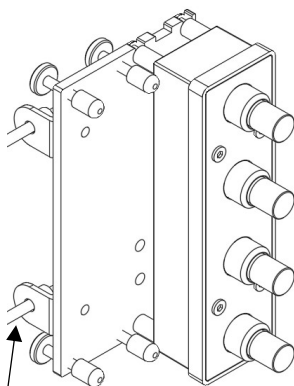*Note that the M4x6 screws go here.*

And the M4x20 screws go here.

rotAIR type-2

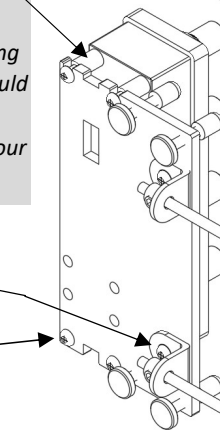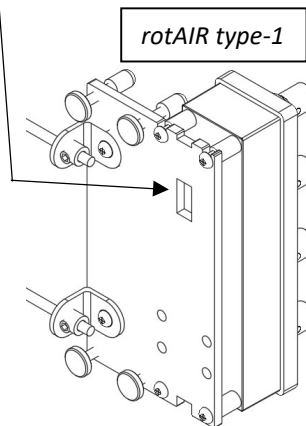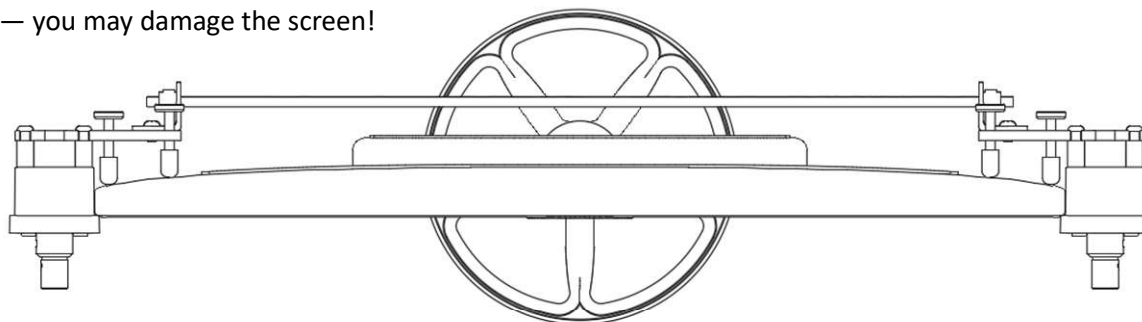*This opening must be aligned with the USB connector.*

rotAIR type-1

Final step: Stretch the elastic cords and place the rotAIR units on both sides of the monitor at your desired height. Then tighten the 8 Knurl bolts M4x25:

   -Outer bolts: lock the rotAIRs in place.

   -Inner bolts: align the rotAIRs or apply a slight tilt for better pilot viewing angle.

⚠ Warning: Do not overtighten — you may damage the screen!

Lateral screen support

Blueprint & dimensions (mm)

68.35

124.5

42